


带法兰 齿型惰轮

— T5 · T10型 —

Order 订货示例
 型式 (1 Type · 2 齿数 · 3 对应皮带)
RD-SBTf28T5100

■中心轴承型

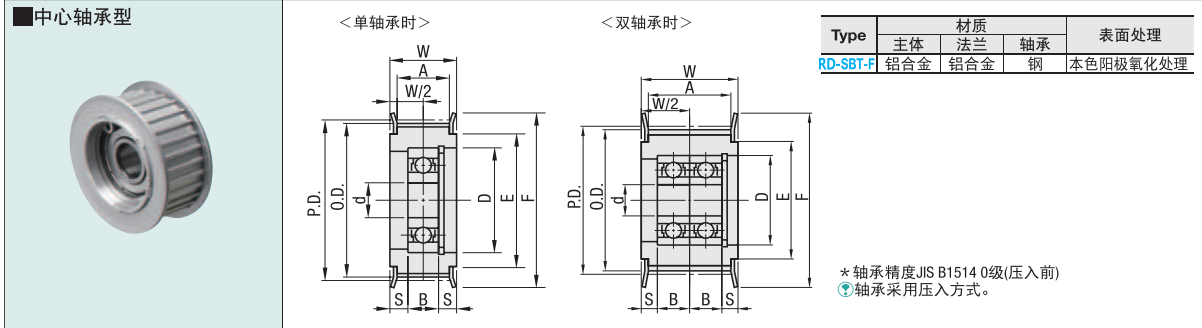

<单轴承时> <双轴承时>

Type	材质			表面处理
	主体	法兰	轴承	
RD-SBT-F	铝合金	铝合金	钢	本色阳极氧化处理

* 轴承精度 JIS B1514 0级(压入前)
 ⊕ 轴承采用压入方式。

■T5型

1 Type	2 齿数	3 对应皮带	轴径 d	P.D.	O.D.	F	E	A	W	S	轴承尺寸		
											No.	D	B
RD-SBT-F	18	T5100	8	28.65	27.8	33	22	11	16	5	698ZZ×1	19	6
		T5150	8	31.83	31	36	24	11	16	5	698ZZ×1	19	6
		T5150	8	31.83	31	36	24	17	22	5	698ZZ×2	19	6
	20	T5100	10	35.01	34.25	40	27	11	16	5	6900ZZ×1	22	6
		T5150	10	38.2	37.4	45	30	11	16	4	6000ZZ×1	26	8
		T5150	10	39.79	39	45	30	11	16	4	6000ZZ×1	26	8
	22	T5100	11	44.56	43.75	48	35	11	16	3.5	6200ZZ×1	30	9
		T5150	11	44.56	43.75	48	35	17	22	6.5	6200ZZ×1	30	9
		T5150	11	44.56	43.75	48	35	17	22	6	6201ZZ×1	32	10
	24	T5100	12	47.75	46.95	52	36	11	16	3	6201ZZ×1	32	10
		T5150	12	47.75	46.95	52	36	17	22	6	6201ZZ×1	32	10
		T5150	12	47.75	46.95	52	36	17	22	6	6201ZZ×1	32	10

■T10型

1 Type	2 齿数	3 对应皮带	轴径 d	P.D.	O.D.	F	E	A	W	S	轴承尺寸		
											No.	D	B
RD-SBT-F	16	T10150	12	50.93	49.05	58	40	17	22	6	6201ZZ×1	32	10
		T10250	12	57.3	55.45	61	45	17	32	5	6202ZZ×2	35	11
		T10150	12	57.3	55.45	61	45	17	22	6	6201ZZ×1	32	10
	18	T10150	15	63.66	61.8	67	50	17	22	6	6202ZZ×2	35	11
		T10250	15	70.03	68.15	80	60	17	22	5.5	6202ZZ×1	35	11
		T10150	15	76.39	74.55	87	67	17	22	5.5	6202ZZ×1	35	11
	20	T10150	15	82.76	80.9	87	67	17	22	5.5	6202ZZ×1	35	11
		T10250	15	82.76	80.9	87	67	17	22	5.5	6202ZZ×1	35	11
		T10150	15	82.76	80.9	87	67	17	22	5.5	6202ZZ×1	35	11


指定加工
 型式 (1 Type · 2 齿数 · 3 对应皮带) — (FC · NFC · LFC · RFC)
RD-SBTf28T5100 - LFC

Alterations	法兰切割	不铆接法兰	仅铆接单侧法兰
Code	FC	NFC	LFC · RFC
Spec.	切割法兰, 降低高度。 FC: 指定单位0.5mm ⊕ 法兰外周未进行表面处理。 ⊕ FC ≥ (O.D.) + 2 ⊕ FC ≤ F - 2 [指定方法] FC35	发货时不铆接法兰。(附带法兰)	发货时仅铆接扣环侧(RFC)或扣环相反侧(LFC)的单侧法兰。(附带1个法兰)

交货期 报价确定

Order 订货示例
 型式 (1 Type · 2 齿数) — 3 适用皮带 — 4 轴径
RD-SBTfW24 - T5200 - 10

■两侧轴承型

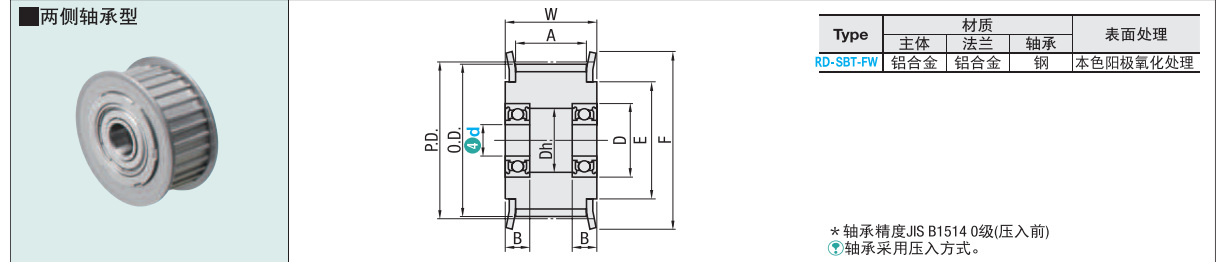

Type	材质			表面处理
	主体	法兰	轴承	
RD-SBT-FW	铝合金	铝合金	钢	本色阳极氧化处理

* 轴承精度 JIS B1514 0级(压入前)
 ⊕ 轴承采用压入方式。

■T5型

1 Type	2 齿数	3 对应皮带	4 轴径 d	P.D.	O.D.	F	E	A	W	Dh	轴承尺寸		
											No.	D	B
RD-SBT-FW	18	T5100	6	28.65	27.8	33	22	11	16	13	696ZZ×2	15	5
		T5150											
		T5200											
		T5250											
		T5100											
		T5150											
	20	T5100	8	31.83	31	36	24	11	16	16.5	698ZZ×2	19	6
		T5150											
		T5200											
		T5250											
		T5100											
		T5150											
	22	T5100	10	35.01	34.25	40	27	11	16	19.5	6900ZZ×2	22	6
		T5150											
		T5200											
		T5250											
		T5100											
		T5150											
	24	T5100	10	38.2	37.4	45	30	11	16	19.5	6900ZZ×2	22	6
		T5150											
		T5200											
		T5250											
		T5100											
		T5150											
25	T5100	10	39.79	39	45	30	11	16	23	6000ZZ×2	26	8	
	T5150												
	T5200												
	T5250												
	T5100												
	T5150												
28	T5100	10	44.56	43.75	48	35	11	16	25	6200ZZ×2	30	9	
	T5150												
	T5200												
	T5250												
	T5100												
	T5150												
30	T5100	12	47.75	46.95	52	36	11	16	27	6001ZZ×2	28	8	
	T5150												
	T5200												
	T5250												
	T5100												
	T5150												

■T10型

1 Type	2 齿数	3 对应皮带	4 轴径 d	P.D.	O.D.	F	E	A	W	Dh	轴承尺寸		
											No.	D	B
RD-SBT-FW	16	T10150	12	50.93	49.05	58	40	17	22	25	6001ZZ×2	28	8
		T10200											
		T10250											
		T10300											
		T10150											
		T10200											
		T10250											
		T10300											
		T10400											
		T10500											
		T10150											
		T10200											
	T10250												
	T10300												
	T10400												
	T10500												
	18	T10150	15	57.3	55.45	61	45	17	22	29	6002ZZ×2	32	9
		T10200											
		T10250											
		T10300											
		T10150											
		T10200											
		T10250											
		T10300											
		T10400											
		T10500											
		T10150											
		T10200											
	T10250												
	T10300												
	T10400												
	T10500												
	20	T10150	15	63.66	61.8	67	50	17	22	30	6202ZZ×2	35	11
		T10200											
		T10250											
		T10300											
		T10150											
		T10200											
		T10250											
		T10300											
		T10400											
		T10500											
		T10150											
		T10200											
	T10250												
	T10300												
	T10400												
	T10500												
22	T10150	20	70.03	68.15	80	60	17	22	37	6004ZZ×2	42	12	
	T10200												
	T10250												
	T10300												
	T10150												
	T10200												
	T10250												
	T10300												
	T10400												
	T10500												
	T10150												
	T10200												
T10250													
T10300													
T10400													
T10500													
24	T10150	20	76.39	74.55	87	67	17	22	41	6204ZZ×2	47	14	
	T10200												
	T10250												
	T10300												
	T10150												
	T10200												
	T10250												
	T10300												
	T10400												
	T10500												
	T10150												
	T10200												
T10250													
T10300													
T10400													
T10500													
26	T10150	20	82.76	80.9	87	67	17	22	37	6204ZZ×2	47	14	
	T10200												
	T10250												
	T10300												
	T10150												
	T10200												

指定加工
 型式 (1 Type · 2 齿数) — 3 适用皮带 — 4 轴径 — (FC · NFC · LFC · RFC)
RD-SBTfW26 - T10200 - 20 - NFC

Alterations	法兰切割	不铆接法兰	仅铆接单侧法兰
Code	FC	NFC	LFC · RFC
Spec.	切割法兰, 降低高度。 FC: 指定单位0.5mm ⊕ 法兰外周未进行表面处理。 ⊕ FC ≥ (O.D.) + 2 ⊕ FC ≤ F - 2 [指定方法] FC35	发货时不铆接法兰。(附带法兰)	发货时仅铆接扣环侧(RFC)或扣环相反侧(LFC)的单侧法兰。(附带1个法兰)

交货期 报价确定