

RD35Q.1.S系列 - 桥式两侧可打开

Series of RD35Q.1.S - Bridge type open of both side



闭合状态：
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注：无字母为普通型
Note: blank means general type

打开方式：
Opening way:



- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式：
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- BFS** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening


接头类型：
Bracket type:

- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket

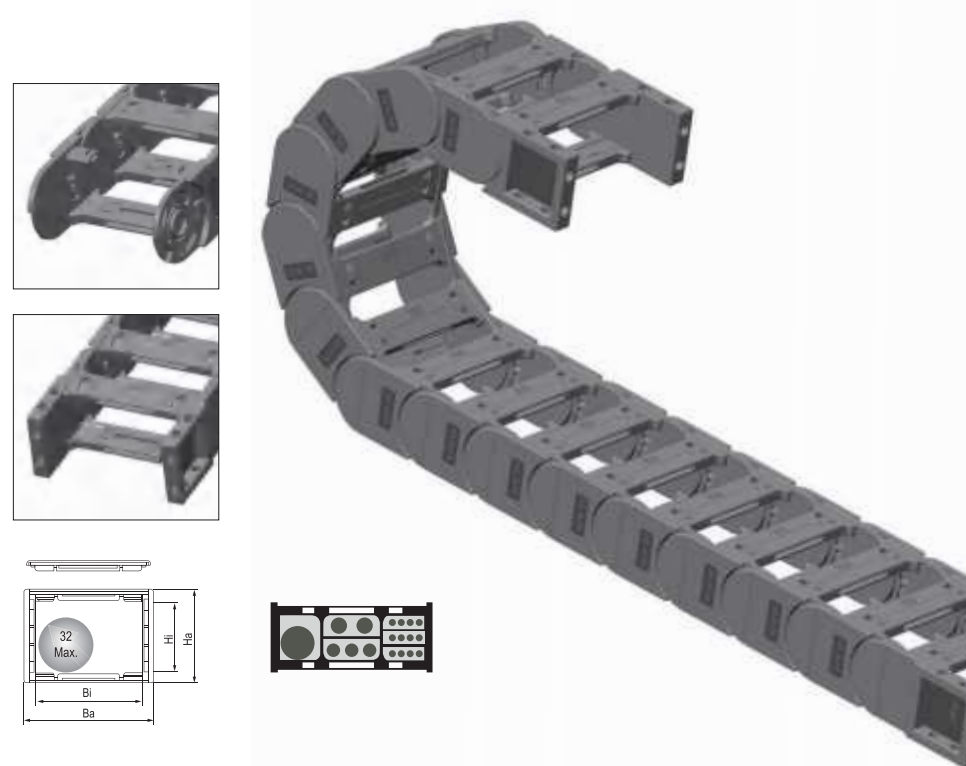

- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain can be mounted separator and cross separator to divide space and effectively protect cables. (See accessories table)
- ◎ The cable chain can be mounted pectinate plate to fix cable better. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 32mm or less of cable.
- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内外侧挡片打开，方便检查或更换线缆
- ◎ 可装竖隔片、横隔片区分空间，更有效保护线缆（见选配区）
- ◎ 可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径 32 毫米以下线缆

主要技术参数 Basic technical data

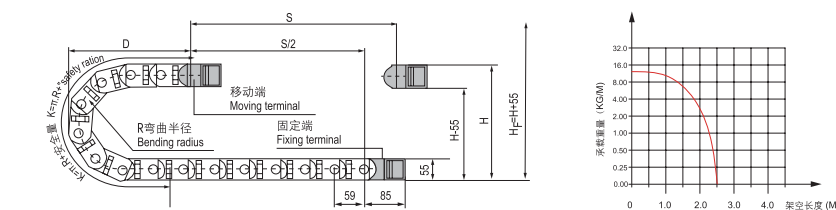


节距=59mm, 每米节数=17, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=59mm, link per meter=17, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	75	100	125	150	200	250
H	205	255	305	355	455	555
D	162	187	212	237	287	337
K	354	472	531	590	767	944

安装实际高度:H_i=H+55mm(负载 1.0kg/m)
Actual mounting height:H_i=H+55mm(load 1.0kg/m)


RD35Q.1.S 系列 - 桥式两侧可打开 Series of RD35Q.1.S-Bridge type open of both side

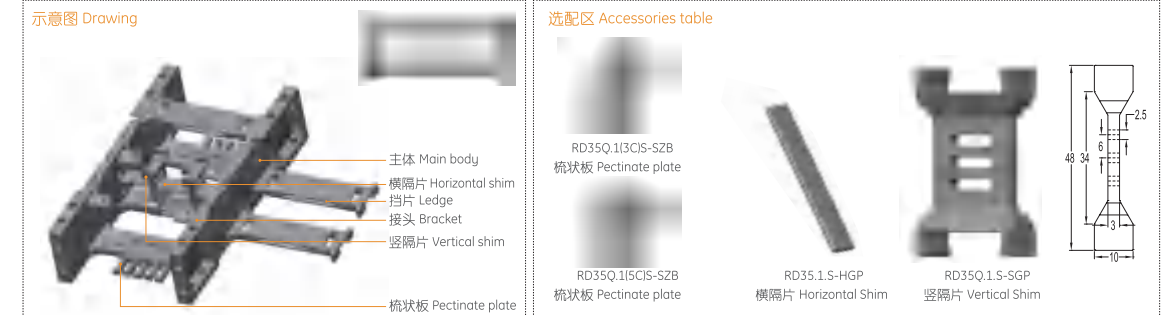

系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数							代号 No.	
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						
RD35Q.1.50S	35	50	55	70	Q.S	75,100,125, 150,200,250	F-Q	7.2	24	64	85	26	15	76	RD35Q.1.50S-FJT
RD35Q.1.60S	35	60	55	80	Q.S		F-Q	7.2	24	74	85	26	15	86	RD35Q.1.60S-FJT
RD35Q.1.75S	35	75	55	95	Q.S		F-Q	7.2	24	89	85	26	15	101	RD35Q.1.75S-FJT
RD35Q.1.90S	35	90	55	110	Q.S		F-Q	7.2	24	104	85	26	15	116	RD35Q.1.90S-FJT
RD35Q.1.100S	35	100	55	120	Q.S		F-Q	7.2	24	114	85	26	15	126	RD35Q.1.100S-FJT
RD35Q.1.117S	35	117	55	137	Q.S		F-Q	7.2	24	131	85	26	15	143	RD35Q.1.117S-FJT
RD35Q.1.125S	35	125	55	145	Q.S		F-Q	7.2	24	139	85	26	15	151	RD35Q.1.125S-FJT
RD35Q.1.130S	35	130	55	150	Q.S		F-Q	7.2	24	144	85	26	15	156	RD35Q.1.130S-FJT
RD35Q.1.150S	35	150	55	170	Q.S		F-Q	7.2	24	164	85	26	15	176	RD35Q.1.150S-FJT
RD35Q.1.154S	35	154	55	174	Q.S		F-Q	7.2	24	168	85	26	15	180	RD35Q.1.154S-FJT
RD35Q.1.175S	35	175	55	195	Q.S		F-Q	7.2	24	189	85	26	15	201	RD35Q.1.175S-FJT
RD35Q.1.200S	35	200	55	220	Q.S		F-Q	7.2	24	214	85	26	15	226	RD35Q.1.200S-FJT
RD35Q.1.250S	35	250	55	270	Q.S		F-Q	7.2	24	264	85	26	15	276	RD35Q.1.250S-FJT
RD35Q.1.300S	35	300	55	320	Q.S		F-Q	7.2	24	314	85	26	15	326	RD35Q.1.300S-FJT

注：S 表示两侧可打开
Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

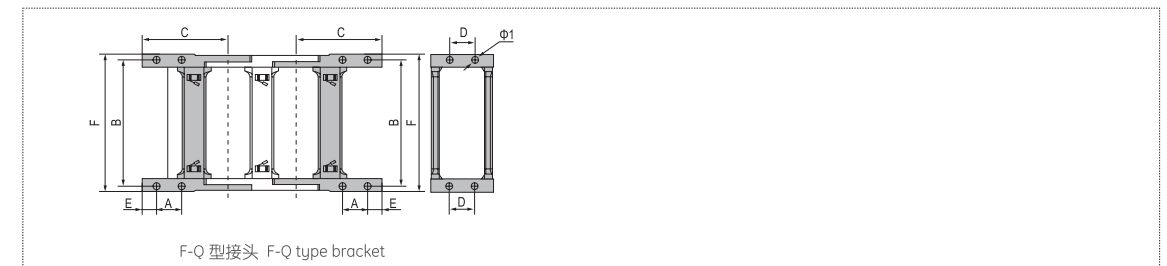

订货示例 Order Sample

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 / 17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter / 17 links)

- 拖链 Chain RD35Q.1.50S R75 1000mm / 17 Links
- 接头 Bracket RD35Q.1.50S -XJT 副 (Set)
- 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注：可根据客户要求定制各种规格。Note: Various sizes can be customized according to customer requirements.